


Technische Daten

Technical data

Flüssigkeitsabscheider Suction line accumulator	Lötanschluss Innen Solder connection ODS		Inhalt Volume	Lötanschluss Wärmeübertrager Solder connection heat exchanger		Abmessungen Dimensions						Gewicht Weight	FL1 Standard FL1 standard
Abb./Typ Fig./Type	Ø SL mm	Ø SL inch	I	Ø FL mm	Ø FL inch	Ø D mm	H mm	A mm	W mm	Z mm	M	kg	
a FA-16W	16	5/8	2,3	16	5/8	124	261	60	80	-	M10	2,4	●
FA-22W	22	7/8	3,5	16	5/8	124	383	60	81	-	M10	3,1	●
FA-28W	28	1-1/8	3,5	16	5/8	124	388	60	81	-	M10	3,5	●
FA-35W	35	1-3/8	7,5	22	7/8	198	333	100	140	-	M10	7,1	●
FA-42W	42	1-5/8	7,5	22	7/8	198	336	100	140	-	M10	7,3	●
FA-54-7W	54	2-1/8	7,5	22	7/8	198	340	100	140	-	M10	7,6	●
FA-54-9W	54	2-1/8	9,5	22	7/8	198	406	100	140	-	M10	8,7	-
b FA-54WT	54	2-1/8	2x7,5	22	7/8	198	361	300	140	300	M12	13,6	-
FA-67/64WT	64	2-1/2	2x7,5	22	7/8	198	396	300	140	300	M12	14,9	-
FA-67WT	67	2-5/8	2x7,5	22	7/8	198	365	300	140	300	M12	14,3	-
c FA-67/64-18W	64	2-1/2	18	22	7/8	302	499	150	140	300	-	17,6	●
FA-67-18W	67	2-5/8	18	22	7/8	302	468	150	140	300	-	17,0	●
FA-80W	80	3-1/8	18	22	7/8	302	470	150	140	300	-	17,9	●
FA-80/89W	89	3-1/2	18	22	7/8	302	526	150	140	300	-	19,2	●
d FA-80-32W	80	3-1/8	32	16	5/8	273	808	207	174	-	-	44,0	●
FA-89-32W	89	3-1/2	32	16	5/8	273	864	262	174	-	-	45,4	●
FA-104-32W	104	4-1/8	32	16	5/8	273	813	221	174	-	-	41,5	●

Ø SL = Saugleitungs-Außendurchmesser
Ø SL = Suction line outside diameter

Ø FL = Flüssigkeitsleitung
Ø FL = Liquid line

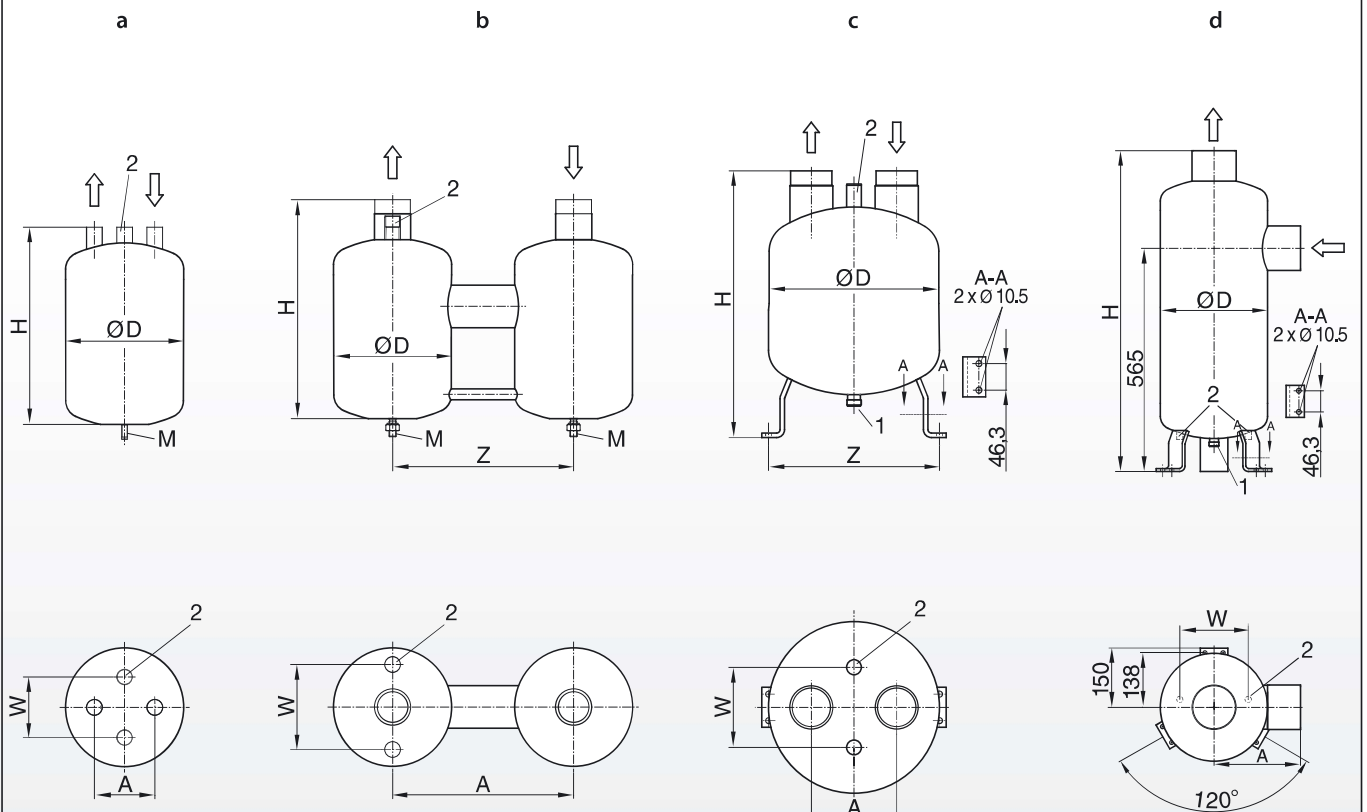

1) Serviceanschluss 1"-14UNS / Service connection 1"-14UNS 2) Wärmeübertrager / Heat exchanger

20180606